

ASHLEIGH


ASHLEIGH	WHIRLPOOL	6060AW
ASHLEIGH	AIR BATH	6060AA
ASHLEIGH	COMBO BATH	6060AWA
ASHLEIGH	TUB ONLY	6060AT

INSTALLATION NOTES: Install this acrylic fixture according to the installation manual. Confirm specifications before starting installation.

ELECTRICAL REQUIREMENTS: Whirlpool pump/motor 120V, 20A, 60HZ, Air Blower/Heater 120V, 20A, 60HZ. Dedicated GFCI required.



All dimensions are +/- 1/4" and subject to change without notice.

Available with an attachable skirt with removable access panel.

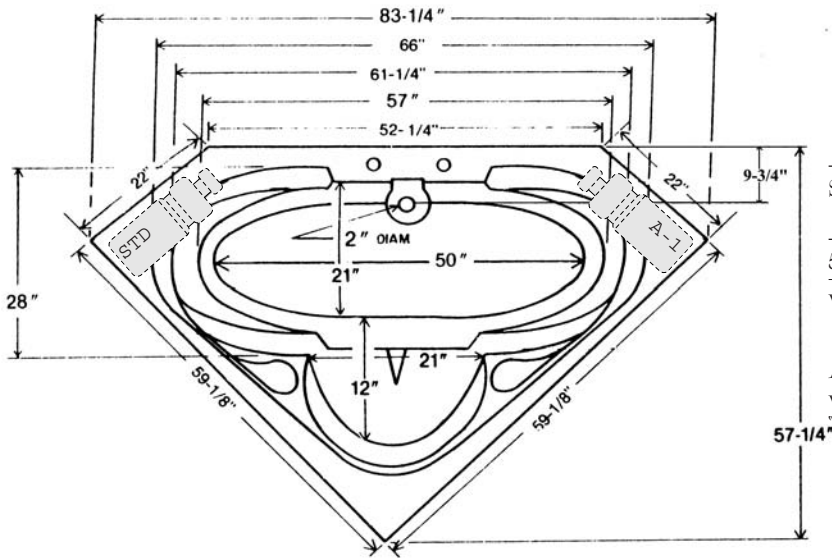

SPECIFICATIONS

	WHIRLPOOL AIR/COMBO	SOAKER
59 1/8" x 59 1/8" x 22" x 22" x 52 1/4" x 23" Lip 2"		
Water Capacity - Operating Level	45.0 gal.	
- To Overflow	82.0 gal.	82.0 gal.
Approx. Unit Weight.....	190.0 lbs.	155.0 lbs.
Water Depth to Overflow	17 3/4"	17 3/4"

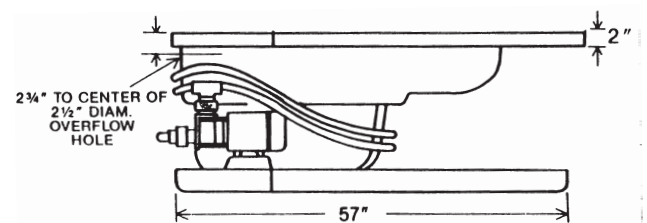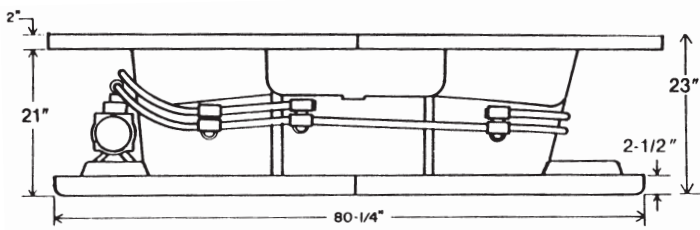

Sales & Customer Service

phone: 800.930.0050
 fax: 800.930.0051
 email: sales@luxurylinetubs.com
 web: www.luxurylinetubs.com

Facilities

1610 James Rodgers Drive
 Valdosta, GA 31601
 510 E Jones St
 Wilson, NC 27893