

# GALLOWAY I

GALLOWAY I  
 GALLOWAY I  
 GALLOWAY I  
 GALLOWAY I  
 GALLOWAY I  
 GALLOWAY I  
 GALLOWAY I  
 GALLOWAY I

WHIRLPOOL  
 AIR BATH  
 COMBO BATH  
 TUB ONLY  
 WHIRLPOOL  
 AIR BATH  
 COMBO BATH  
 TUB ONLY

6042GWSR  
 6042GASR  
 6042RWASR  
 6042GTSR  
 6042GWSL  
 6042GASL  
 6042RWASL  
 6042GTSL


INSTALLATION NOTES: Install this acrylic fixture according to the installation manual. Confirm specifications before starting installation.

ELECTRICAL REQUIREMENTS: Whirlpool pump/motor 120V, 20A, 60HZ, Air Blower/Heater 120V, 20A, 60HZ. Dedicated GFCI required.

All dimensions are  $\pm 1/4"$  and subject to change without notice.

All models shown are made with an integral skirt and integral tiling flange

\* Left or Right Drain

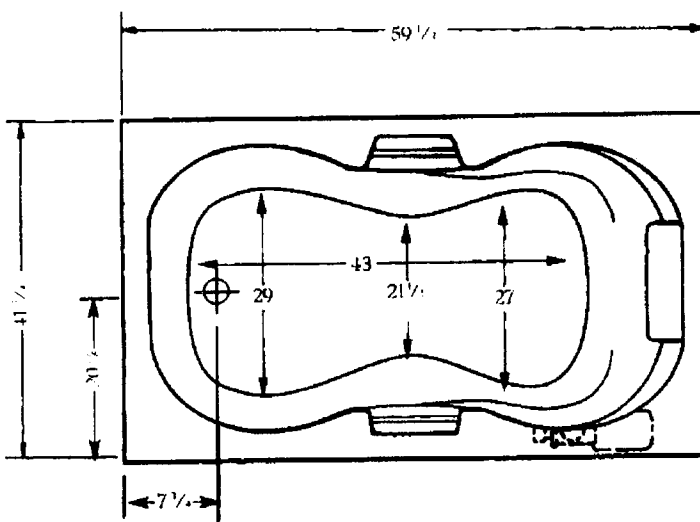



Access panels on skirts are provided for all tubs with pumps, blowers, heaters

ELECTRICAL SPECIFICATIONS - 115V, 20 AMP, GFCI Protected Circuit.

Left and right drain available.

SPECIFICATIONS	WHIRLPOOL	TUB
41 1/4" x 59 1/4" x 21 1/2" Up-flange 1 1/2"		
Water Capacity - Operating Level	42.0 gal.	
- To Overflow	89.0 gal.	89.0 gal.
Approx. Unit Weight	170.0 lbs.	140.0 lbs.
Approx. Shipping Weight	235.0 lbs.	190.0 lbs.

\*All dimensions are  $\pm 1/4"$  and subject to change without notice. Always pre-measure tub/whirlpool prior to framing alcove or creating deck installation cut out.

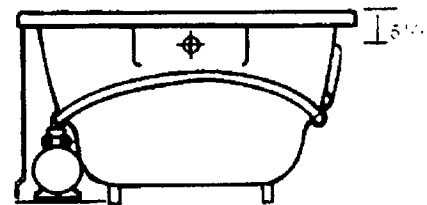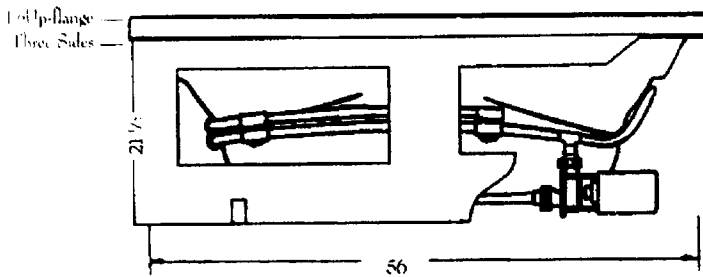

Sales & Customer Service

phone: 800.930.0050

fax: 800.930.0051

email: sales@luxurylinetubs.com

web: www.luxurylinetubs.com

Facilities

1610 James Rodgers Drive

Valdosta, GA 31601

510 E Jones St

Wilson, NC 27893

# GALLOWAY II

GALLOWAY II  
 GALLOWAY II  
 GALLOWAY II  
 GALLOWAY II  
 GALLOWAY II  
 GALLOWAY II  
 GALLOWAY II  
 GALLOWAY II

WHIRLPOOL  
 AIR BATH  
 COMBO BATH  
 TUB ONLY  
 WHIRLPOOL  
 AIR BATH  
 COMBO BATH  
 TUB ONLY

7242GWSR  
 7242GASR  
 7242RWASR  
 7242GTSR  
 7242GWSL  
 7242GASL  
 7242RWASL  
 7242GTSL

INSTALLATION NOTES: Install this acrylic fixture according to the installation manual. Confirm specifications before starting installation.

ELECTRICAL REQUIREMENTS: Whirlpool pump/motor 120V, 20A, 60HZ, Air Blower/Heater 120V, 20A, 60HZ. Dedicated GFCI required.


All dimensions are  $\pm 1/8$ " and subject to change without notice. //

All models shown are made with an integral skirt and integral tiling flange

Access panels on skirts are provided for all tubs with pumps, blowers, heaters



ELECTRICAL SPECIFICATIONS - 115V, 20 AMP, GFCI Protected Circuit.

Left and right drain available.

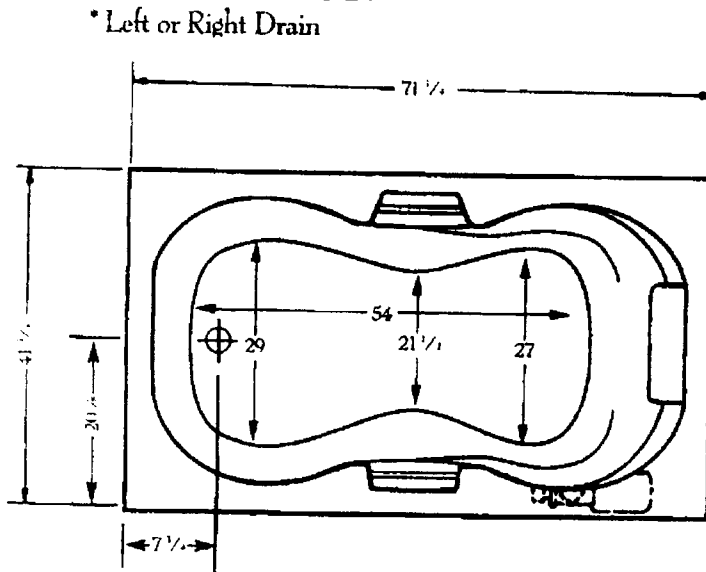

SPECIFICATIONS	WHIRLPOOL	TUB
41 1/2" x 71 1/4" x 21 1/2" Up-flange 1 1/2"		
Water Capacity - Operating Level .....	52.0 gal.	
- To Overflow .....	94.0 gal.	94.0 gal.
Approx. Unit Weight .....	185.0 lbs.	150.0 lbs.
Approx. Shipping Weight .....	250.0 lbs.	215.0 lbs.

\*All dimensions are  $\pm 1/8$ " and subject to change without notice. Always pre-measure tub/whirlpool prior to framing alcove or creating deck installation cut out.

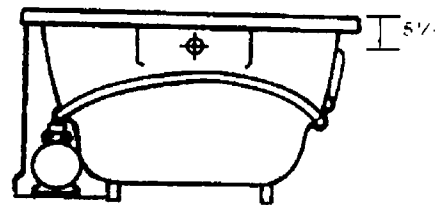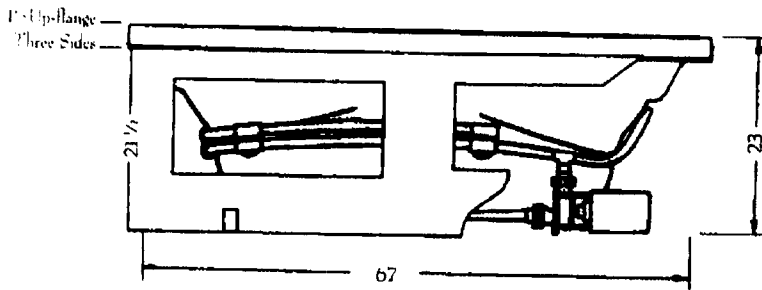

PUMP MOTOR: Standard 1 1/4 HP, Single Phase, 115V, 60HZ, 3425 RPM, Pre-installed (factory)

ELECTRICAL REQUIREMENTS: 115V, 20 AMP, GFCI Protected Circuit.



**Sales & Customer Service**

phone: 800.930.0050  
 fax: 800.930.0051  
 email: sales@luxurylinetubs.com  
 web: www.luxurylinetubs.com

**Facilities**

1610 James Rodgers Drive  
 Valdosta, GA 31601

510 E Jones St  
 Wilson, NC 27893